

FirePoint-2




Lloyds Alarms Ltd

3 Connaught Business Centre

Malham Rd, London SE23 1AH

Phone. 020- 8699 8599 Fax. 020- 8699 9290

Interconnecting 2 FirePoint panels to form one larger installation

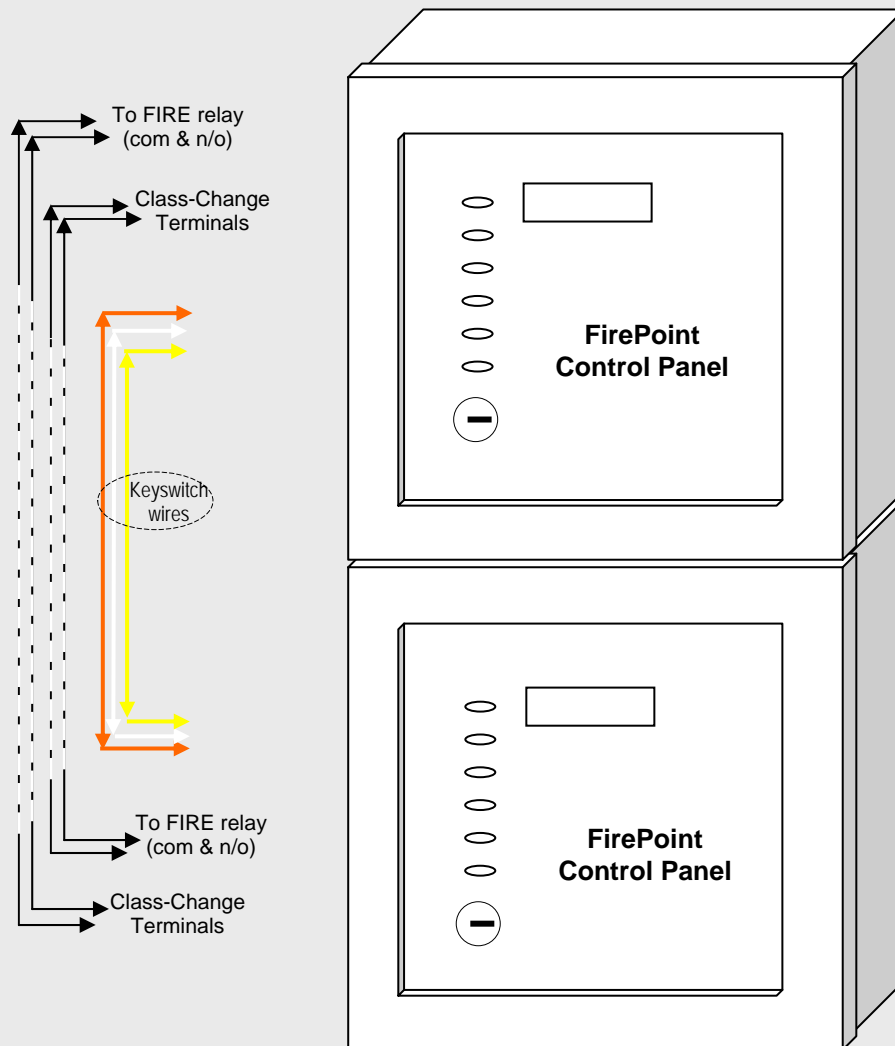

Interconnecting 2 FirePoint panels to form one larger installation

2 x FirePoint panels can be interconnected to make one larger installation. A double-size flush mounting frame to encompass both panels is available from Lloyds alarms if required.

Fit one control panel above the other, or if you fit them side-by-side remember to allow a gap to enable the lid of the right-hand FirePoint to swing open.

Connect the Fire Relay (com & n/o) of one panel, to the Class-Change terminals of the other panel, and vice-versa (this will enable either control panel to make the other one sound the alarms).

Connect the Orange, White & Yellow keyswitch wires on one control panel to the same colours on the other panel, this will enable a key to be left in either panel for full operation.